G1

CATEGORY: Agricultural / Landscape maintenance
WORKING WIDTH (m): 0.90 – 1.20
MOWER: Rear

THE ROTARY MOWER FOR GROUNDS AND VINEYARD MAINTENANCE

These top-of-the-range Lagarde rotary mowers have assets you'll find hard to resist – efficiency, strength and versatility. The G1 rotary mower meets Lagarde's quality standards and is intended to be drawn by low-power tractors and tackle the narrowest working widths.

THE STANDARD ESSENTIALS

- Body structure in reinforced high tensile steel
- Cranked and twisted treated steel blades for better updraft
- Chains can be added for shredding hard vegetation
- Cutting heads retract in the event of impact to protect parts
- Crank gearbox protected by a bolted safety device on the PTO shaft
- Angled gear box
- Front and rear chain guard
- Sloping rear chassis saves space at turnrows

The options →friction clutch on transmission shaft, free wheel on PTO shaft, etc.

CUTTING HEADS

2 cranked, twisted blades

4 chains

LAGARDE

MORE DETAILS
www.lagarde-sas.fr

		G1 90	G1 100	G1 110	G1 120
Dimensions	Working width (m)	0.90	1.00	1.10	1.20
	Overall width (m)	0.97	1.07	1.17	1.27
	Overall length (m)	1.05	1.15	1.25	1.35
	Type of hitch	Hitch CAT 1			
	Hitch centring	8 cm offset to the right			
	Optional hydraulic offset (mm)	▬	▬	▬	500
	Weight (kg)	154	178	208	236 / 284
Tools	No. of rotors	1	1	1	1
	No. of blades	2 cranked, twisted blades (70x15 mm)			
	No. of chains	4 x 13-mm chains			4 x 18-mm chains
Features	Gearbox (HP)	50	50	50	50
	PTO (rpm)	540	540	540	540
	PTO shaft	1⅜'', 6 splines. Shearing bolt (clutch and free wheel safety option)			
	Front protection	Chain guard			
	Rear protection				
	Ground following	Height-adjustable skids			
	Required power (HP)	20	20	25	25
Options	Double hitch	▬	▬	▬	▬
	Hydraulic offset	▬	▬	▬	○
	Rear wheel	▬	▬	▬	▬
	Rear roller	▬	▬	▬	▬
	Free wheel on PTO shaft	○	○	○	○
	Friction clutch on PTO shaft	○	○	○	○
	Road signalling kit	▬	▬	▬	▬
	Cutting tool kit	○	○	○	○

● Standard ▬ Not available ○ Optional

KINEMATICS

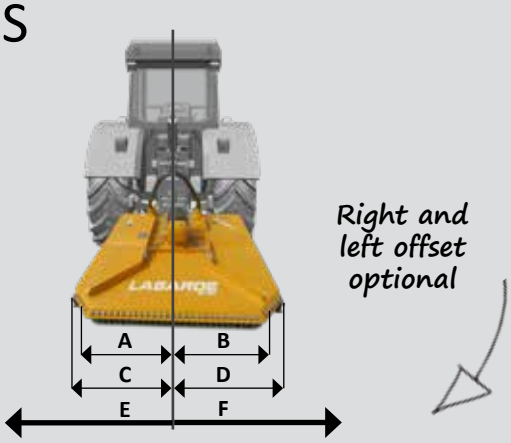

Widths in mm			G1 90	G1 100	G1 110	G1 120
Working		A	450	420	470	520
		B	450	580	630	680
Overall		C	485	455	505	555
		D	485	615	665	715
Offset	Working	E	▬	▬	▬	770
		F	▬	▬	▬	770

Equipment designed to last

LAGARDE - 65 Avenue de Tréville - 64130 Mauléon Licharre
Tél : +33 5 59 19 20 10 - Fax : + 33 5 59 19 20 11 - contact@lagarde-sas.fr

LAGARDE

Your LAGARDE dealer